

### DS-7106

(ANSI : CEM-1)

COPPER CLAD LAMINATES

#### FEATURES

- Excellent punchability
- Significant reduction in dusting
- Long punching tool life
- Low warpage at high temperature


#### APPLICATIONS

Automotive radio, Television, Smoke alarm, Power supply, Keyboard, Clock, etc.,


#### INTERNATIONAL STANDARD RECOGNITION

- UL : E103670
- CSA : LS- 93237
- BSI : 6741
- VDE : VDE - Reg - Nr. 4945

■ Peel strength at elevated temp(Cu.Foil 1 oz)

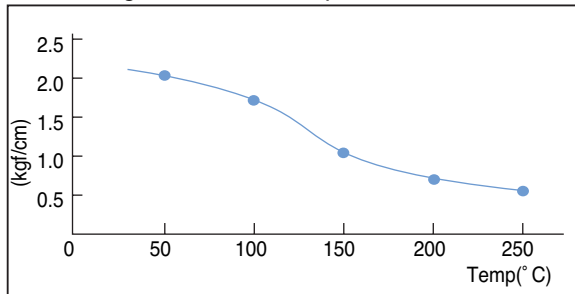


■ Dielectric Constant

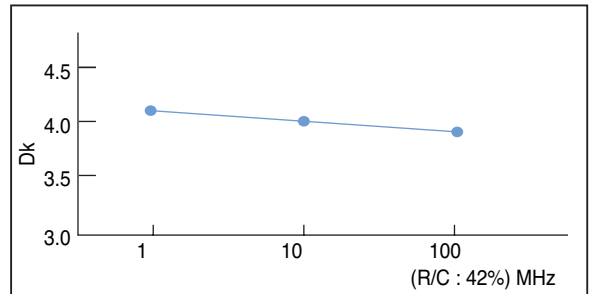


■ Dimensional stability

PCB process(size 360×310mm span 310×254mm)

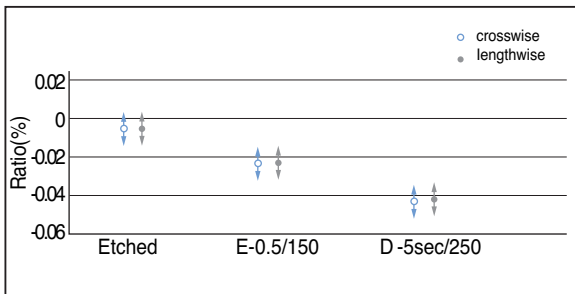


■ Dimensional stability

Test method(IPC-TM-650 2.4.39)

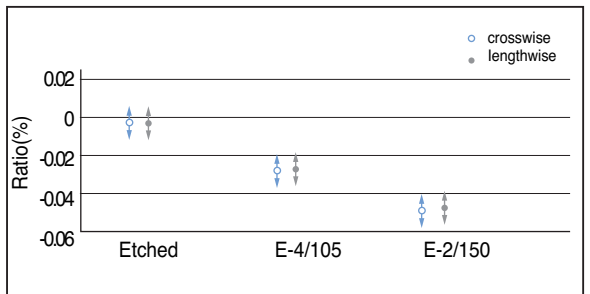

■ Warpage through PCB process(thickness 1.6mm Single side)

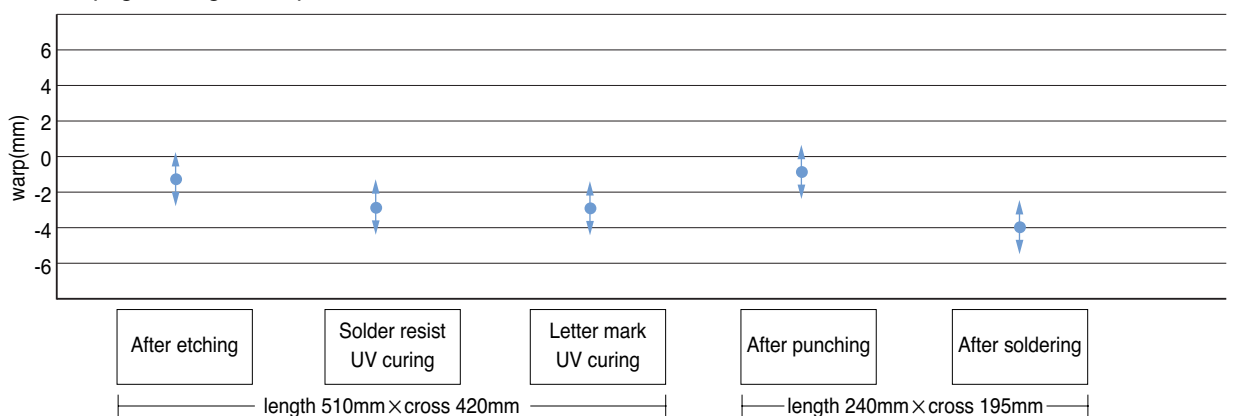

## GENERAL PROPERTIES

Test Item	Unit	Treatment Condition	Designation	DS-7106
			ANSI Grade	CEM-1
			Property Data	
			Standard Value	Guaranteed Value
Flammability	-	UL-94	V-0	V-0
Insulation Resistance	ohm	C-96/20/65 C-96/20/65+D-2/100	$1 \times 10^{13} - 1 \times 10^{14}$ $1 \times 10^{10} - 1 \times 10^{11}$	above $1 \times 10^{11}$ above $1 \times 10^9$
Volume Resistivity	ohm-cm	C-96/20/65 C-96/20/65+C-96/40/90	$1 \times 10^{14} - 1 \times 10^{15}$ $1 \times 10^{13} - 1 \times 10^{14}$	above $5 \times 10^{12}$ above $5 \times 10^{11}$
Surface Resistance	ohm	C-96/20/65 C-96/20/65+C-96/40/90	$1 \times 10^{13} - 1 \times 10^{14}$ $1 \times 10^{12} - 1 \times 10^{13}$	above $1 \times 10^{12}$ above $1 \times 10^{11}$
Arc Resistance	min.seconds		100	above 60
Dielectric Constant (1 MHz)	-	C-96/20/65 C-96/20/65+D-48/50	4.0 - 4.5 4.2 - 4.8	less than 4.8 less than 5.2
Dissipation Factor (1 MHz)	-	C-96/20/65 C-96/20/65+D-48/50	0.015 - 0.020 0.018 - 0.023	less than 0.035 less than 0.045
Comparative Tracking Index	volt	IEC Method	250	above 250
Solder Float (260°C)	sec	A	above 60	above 20
Peel Strength	Cu.foil 1 oz (0.035mm) kgf/cm	A	1.6 - 2.2	above 1.43
Flexural Strength	kgf/mm <sup>2</sup>	A	30 - 35	above 20.4
Water Absorption	%	E-24/50+D-24/23	0.23 - 0.28	less than 0.50
Punching Temperature	°C	A	Ambient	Ambient

Specimen Thickness : 1.6mm

## PURCHASING INFORMATION

- Copper foil : 0.5 oz/ft<sup>2</sup>(0.018 mm), 1 oz/ft<sup>2</sup>(0.035 mm), 2 oz/ft<sup>2</sup>(0.070 mm) available.
- Thickness : 0.8mm to 1.6mm

Standard Size		Tolerance(mm)
1,020 X 1,220mm (40" X 48")	915 X 1,220mm (36" X 48")	+3
1,070 X 1,220mm (42" X 48")	970 X 1,220mm (38" X 48")	-0
1,020 X 1,020mm (40" X 40")		

※ Other sheet size and thickness could be available upon request.